


Series 293

- The micrometer's 330° rotatable display unit enables easy reading in all measurement positions.
- With Carbide-tipped measuring faces



No.	Range [mm]	Digital step	Max. Permissible Error J MPE	Flatness	Parallelism	Measuring force [N]	L [mm]	b [mm]	Mass [g]
293-582	300 - 325	0,001 mm	±6 μm	0,6 μm	5 μm	10-14	353	187	2000
293-583	325 - 350	0,001 mm	±6 μm	0,6 μm	5 μm	10-14	378	199	2150
293-584	350 - 375	0,001 mm	±6 μm	0,6 μm	5 μm	10-14	403	212	2300
293-585	375 - 400	0,001 mm	±7 μm	0,6 μm	6 μm	10-14	428	224	2450
293-586	400 - 425	0,001 mm	±7 μm	0,6 μm	6 μm	10-14	453	236	2600
293-587	425 - 450	0,001 mm	±7 μm	0,6 μm	6 μm	10-14	478	248	2750
293-588	450 - 475	0,001 mm	±8 μm	0,6 μm	6 μm	10-14	503	261	2900
293-589	475 - 500	0,001 mm	±8 μm	0,6 μm	7 μm	10-14	528	273	3100

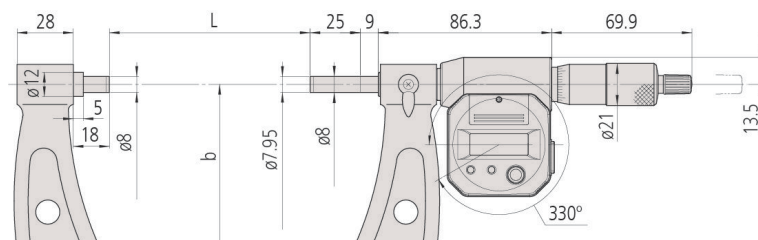

The display is 330° rotatable

A detailed line drawing of a medical device, likely a ventilator or pump. The device has a rectangular control panel with a small screen and several buttons. It features various connection ports, including a large circular port on the left and a smaller one on the right. The drawing is in a technical, schematic style.

Mitutoyo