


U-WAVE

U-WAVE (Transmitter)

No.	Measuring Instruments	Remarks	Data reception indication	Transmission output	Type	Mass [g]
264-620	100, 150, 200, 300 mm IP67 caliper/standard caliper	IP67	LED (green, red, orange)	2,5 mW (4 dBm) or below	U-WAVE-TC (U-WAVE fit)	20
264-621	100, 150, 200, 300 mm IP67 caliper/standard caliper	Standard	Buzzer and LED (green, red, orange)	2,5 mW (4 dBm) or below	U-WAVE-TC (U-WAVE fit)	20
264-622	COOLANT PROOF (IP65) micrometer, indicator	IP67	LED (green, red, orange)	2,5 mW (4 dBm) or below	U-WAVE-TM (U-WAVE fit)	20
264-623	COOLANT PROOF (IP65) micrometer, indicator	Standard	Buzzer and LED (green, red, orange)	2,5 mW (4 dBm) or below	U-WAVE-TM (U-WAVE fit)	20
02AZD730G	Indicator, 3-Point Inside Micrometer, Carbon Fibre Caliper, Height Gauge, a.s.o	IP67	LED (green, red, orange)	2,5 mW (4 dBm) or below	U-WAVE-T for miscellaneous instruments	23
02AZD880G	Indicator, 3-Point Inside Micrometer, Carbon Fibre Caliper, Height Gauge, a.s.o	Standard	Buzzer and LED (green, red, orange)	2,5 mW (4 dBm) or below	U-WAVE-T for miscellaneous instruments	23



264-620 + 02AZF310
U-WAVE-TC (Transmitter) + Connection Unit



264-622 + 02AZF310
U-WAVE-TM (Transmitter) + Connection Unit



02AZD730G + 02AZD790A
U-WAVE-T (Transmitter) + Connection Cable



02AZF670 + U-WAVE-TM
+ 02AZD790F




02AZE200 + U-WAVE-T
+ 02AZD790F

U-WAVE-R (Receiver) for all Mitutoyo U-WAVE Transmitter (except U-WAVE Bluetooth)

No.	Remarks	Number of U-WAVE-R units that can be connected to PC	Number of U-Wave-T units that can be connected	Transmission output	Type	Mass [g]
02AZD810D	U-WAVE-R + Software (U-WAVE-PAK)	Up to 16	Up to 100	1 mW (0 dBm) or below	U-WAVE-R	130



02AZD810D
U-WAVE-R (Receiver)

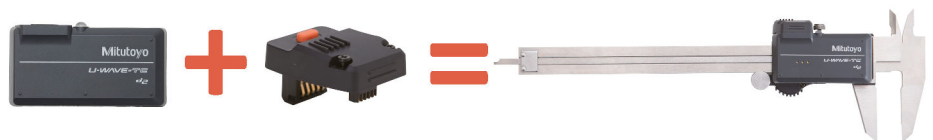

Transmitter and Connection Unit (see page after next page) for Caliper (U-WAVE-TC + 02AZF300)



Transmitter and Connection Unit (see page after next page) for Micrometer (U-WAVE-TM + 02AZF310)



Transmitter and Connection Cables (see page after next page) e.g. for Digital Indicator